


For Reflex or Transparent Standard Size 1 through 9 Glass

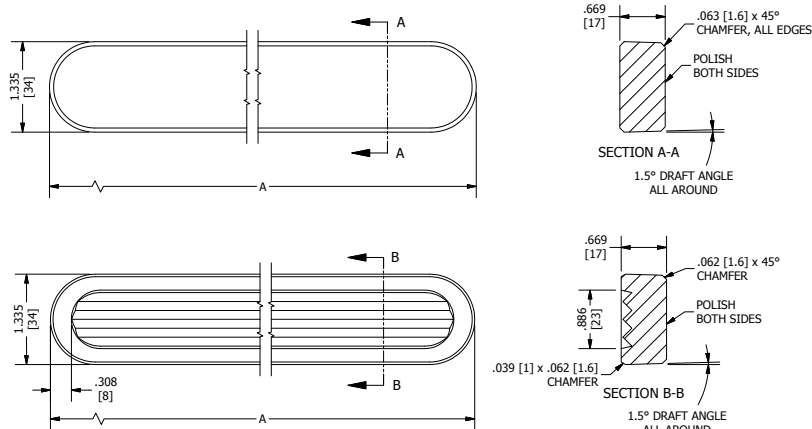

Glass Size	Dimension "A"	
	Inches	mm
1	4.500	115
2	5.500	140
3	6.500	165
4	7.500	190
5	8.625	220
6	9.875	250
7	11.000	280
8	12.625	320
9	13.375	340

Part Number	Material	Description
V-16756-X	Tempered Borosilicate	Standard Transparent Glass, compliant to BS3463, JIS B8211, DIN 7081. For temperature to 600°F, (316°C). When protected with Mica Shield can be used to 608°F (320°C).
V-16757-X	Tempered Borosilicate	Standard Reflex Glass, compliant to BS3463, JIS B8211, DIN 7081. For temperature to 600°F, (316°C).
V-16758-X	Tempered Borosilicate	High pressure Transparent Glass, compliant to BS3463, JIS B8211, DIN 7081. For temperature to 600°F, (316°C). When protected with Mica Shield can be used to 608°F (320°C). Polished to Maximum Flatness Tolerance 0.05 mm.
V-15841-X	Tempered Aluminosilicate	High Temperature Transparent Glass. For temperature to 800°F (427°C).
V-15840-X	Tempered Aluminosilicate	High Temperature Reflex Glass. For temperature to 800°F (427°C).
P-4452-X	Mica	Standard Mica Shield, Grade V2 / V4 .005 - .007" Thickness
P-8092-X	Mica	HQ Mica, Grade V2 / V4 .009 - .012" Thickness
P-6082-X	PCTFE	PCTFE Shield (formerly known as Kel-F). A sealing gasket is not used with this shield.
V-18980-X	Garlock® IFG 5500	Standard Gasket, suitable for most hydrocarbon service.
V-13143-X	SS Reinforced Graphite	Jerguson uses a laminated graphite with 0.002" 316SS sheet reinforcement. Jerguson has extensively tested un-reinforced graphite, and has found that it will not hold up to pressure cycling conditions, and is not recommended.
V-7858-X	PTFE	Low-Flow PTFE gasket, This is designed to reduce cold flow associated with solid PTFE.

Note: Replace "X" in all Part Numbers with the Glass Size. Parts supplied by sources other than Jerguson will void stamped pressure rating.

OEM Parts...
FAST!

Same Day Shipping on
Quality OEM Parts
clark-reliance.com/parts