

GENERAL NOTES:

- 1. DIMENSIONS
- SHOWN IN INCHES W/ MM EQUIVALENTS IN **BRACKETS**
- OVERALL LENGTH = CENTERS + X + Y
- 2. OPERATING CONDITIONS
- MAX PRESSURE & MAX TEMPERATURE REQUIRED FOR PROPER GAGE DESIGN
- 3. PART NUMBER
- CONSULT "MAGNICATOR® II MAGNETIC LIQUID LEVEL INDICATION PRODUCTS" (BULLETIN M100.01) FOR COMPLETE PART NUMBER DETAILS & LIST OF AVAILABLE OPTIONS
- FOLLOW MAGNICATOR® II PART NUMBERING FORMAT, REPLACING "MII" WITH "BPC" AND FILLING IN ALL OTHER APPLICABLE INFORMATION
- 4. STANDPIPE SIZE
- 3" [80] SCH. 40 (STANDARD)
- CONSULT FACTORY FOR OPTIONAL STANDPIPE SIZE AND/OR SCHEDULE (DEPENDENT ON **OPERATING CONDITIONS)**
- 5. MATERIALS OF CONSTRUCTION
- CONSULT "MAGNICATOR® II MAGNETIC LIQUID LEVEL INDICATION PRODUCTS" (BULLETIN M100.01) FOR A COMPLETE LIST OF AVAILABLE MATERIALS (I.E., BYPASS CHAMBERS AVAILABLE IN SAME MATERIALS AS MAGNICATOR® II)
- 6. PROCESS CONNECTIONS
- ½" [15] THRU 1" [25] ANSI/ASME RAISED-FACE SLIP-ON FLANGES (STANDARD)
- 1 1/2" [40] THRU 6" [150] ANSI/ASME RAISED-FACE SLIP-ON FLANGES (REDUCED TO 1") AVAILABLE ON REQUEST (MAY REQUIRE INCREASE IN SECTION A-A DIMENSION SHOWN)
- (2) SIDE CONNECTIONS (STANDARD)
- (2+) SIDE CONNECTIONS AVAILABLE ON REQUEST
- 7. DRAIN CONNECTION
- ½" [15] FNPT (SHOWN) (STANDARD)
- 1/2" [15] THRU 1 1/2" [40] FNPT, MNPT, FSW, & MSW
- 1/2" [15] TO 4" [100] RAISED-FACE ANSI/ASME & DIN FLANGED
- 8. GUIDED WAVE RADAR (GWR) TRANSMITTER
- WHEN SUPPLIED W/ A GWR TRANSMITTER, THE GWR PROBE LENGTH WILL EXTEND 2" BELOW THE BOTTOM PROCESS CONNECTION
- TOTAL PROBE LENGTH = CENTERS + 2" + X DIMENSION (SEE TABLE AT TOP OF DRAWING)

OPTION	Х	
W/O STEAM COMPENSATION	8.000"	
W/ STEAM COMPENSATION	18.000"	

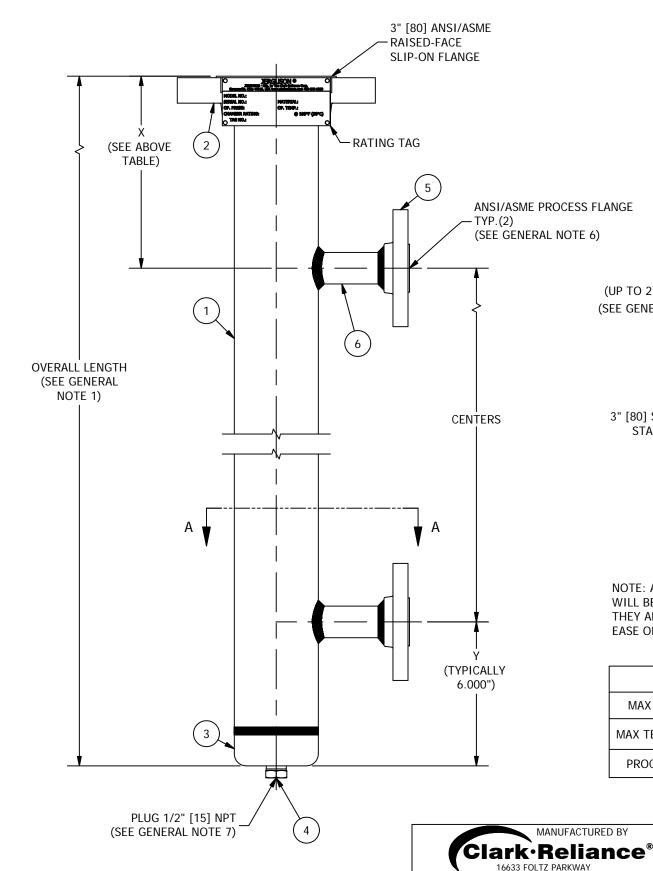


BILL OF MATERIAL					
NO.	NAME OF PART	MATERIAL	REMARKS		
1	STANDPIPE				
2	FLANGE, SLIP-ON				
3	CAP				
4	PLUG				
5	PROCESS FLANGE				
6	NIPPLE				

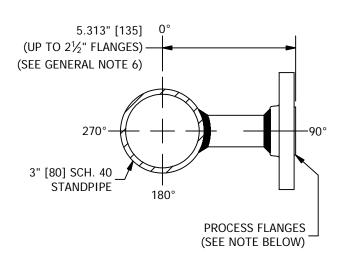

NOTE: AS STANDARD, PROCESS CONNECTIONS WILL BE ORIENTED AT 0° (180° FROM RATING TAG). THEY ARE SHOWN IN THIS DRAWING AT 90° FOR EASE OF VIEWING.

SECTION A-A

OPERATING CONDITIONS		
MAX PRESSURE		
MAX TEMPERATURE		
PROCESS FLUID		

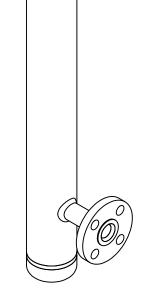

MANUFACTURED BY **JERGUSON**® MODEL BPC-SF **BYPASS CHAMBER** STRONGSVILLE, OH 44149 USA (440) 572-1500 | www.clarkreliance.com (W/ 150-300# ANSI/ASME FLANGES)

© Clark-Reliance® Corporation. All Rights Reserved.

CHECKED: MK DATE: 4/14/2014 REVISION: 0 0 **BPC-SF1**