



BILL OF MATERIAL (REFLEX GAGE)					
NO.	NAME OF PART	QTY.	MATERIAL	PART NO.	SPECIFICATION
1.	CHAMBER, REFLEX	1	316/316LSS	PER ORDER	A511 GR.MT316/316L
2	GASKET	1 PER SECT.	IFG5500	V18980 ___	
3	GLASS, REFLEX	1 PER SECT.	BOROSILICATE	V16757 ___	
4	CUSHION	1 PER SECT.	IFG5500	V18980 ___	
5	COVER	1 PER SECT.	316/316LSS	V438 ___ TL2	A276
6	U-BOLT	SEE CHART	316SS	P8200 B8M	A193 GR.B8M
7	HEAVY HEX NUT	SEE CHART	316SS	P78 12 B8M	A194 GR.8M
8	WASHER	2	304SS	V13936 R	
9	TAG, RATING	1	304SS	V21864	

- NOTES:
- DIMENSIONS IN INCHES W/ mm EQUIVALENTS IN BRACKETS.
 - REFLEX GAGE RATING VARIANCE:
 - 4000 PSI (281 KG/CM²) @ 100°F (38°C)
 - 2300 PSI (162 KG/CM²) @ 800°F (427°C)
 - >550°F REQUIRES GRAFOIL GASKETS
 - >600°F REQUIRES GRAFOIL GASKETS & ALUMINOSILICATE GLASS
 - MAX SATURATED STEAM RATING FOR REFLEX GAGE IS 300 WSP.
 - REFER TO THE FOLLOWING (FOR):
 - CATALOG BULLETIN J100.10 (FULL RATINGS & ADDITIONAL INFORMATION)
 - 10M BULLETIN J500.05 (INSTRUCTIONS)
 - PRICE SHEET BULLETINS J800.11, 12, 18 (AVAILABLE OPTIONS)
 - CONSULT FACTORY FOR ALTERNATE MATERIAL OPTIONS.

1/2" [15] OR 3/4" [20] FNPT OR FSW
BOTH ENDS


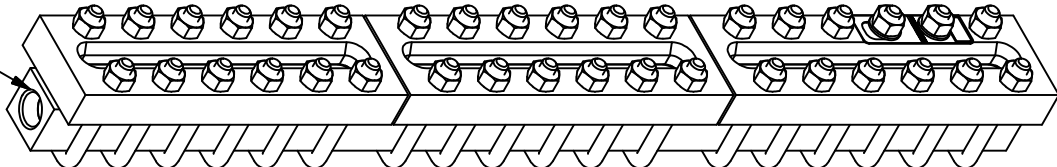


REFLEX GAGE
R-32

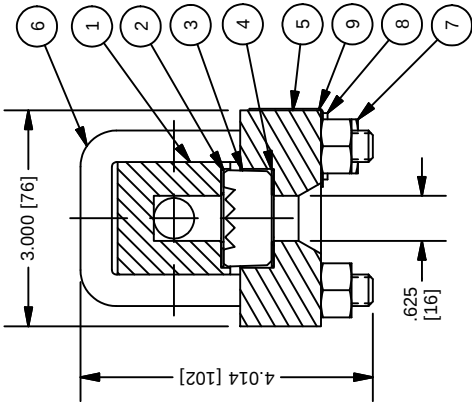

SECTION X-X
SERIES R-32


FRONT VIEW
REFLEX & TRANSPARENT
SERIES 32 GAGES

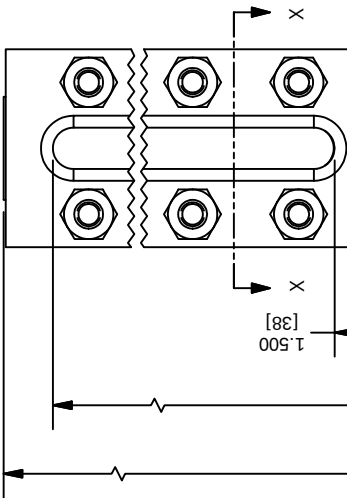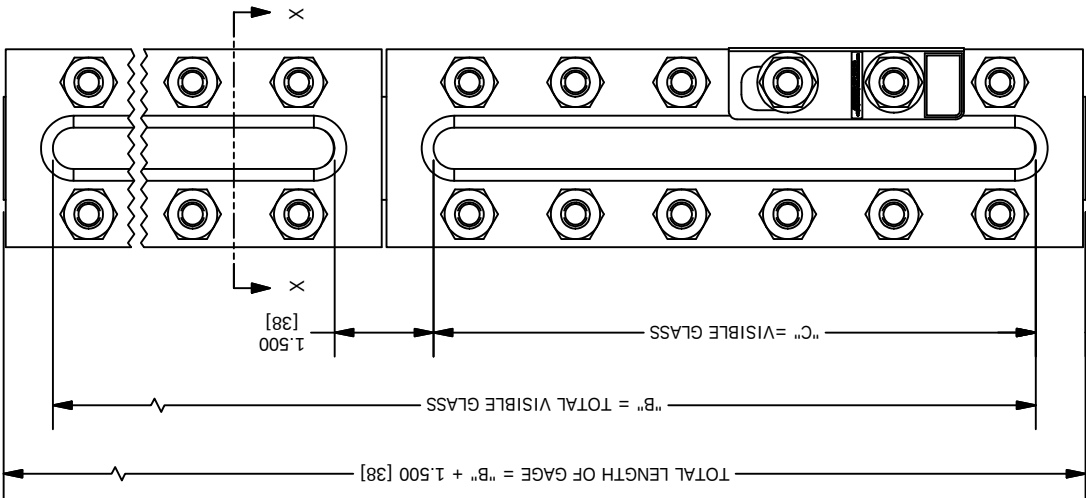

BILL OF MATERIAL (TRANSPARENT GAGE)					
NO.	NAME OF PART	QTY.	MATERIAL	PART NO.	SPECIFICATION
1.	CHAMBER, TRANSPARENT	1	316/316LSS	PER ORDER	A511 GR.MT316/316L
2	GASKET	2 PER SECT.	IFG5500	V18980 ___	
3	GLASS, TRANSPARENT	2 PER SECT.	BOROSILICATE	V16756 ___	
4	CUSHION	2 PER SECT.	IFG5500	V18980 ___	
5	COVER	2 PER SECT.	316/316LSS	V438 ___ TL2	A276
6	BOLT	SEE CHART	316SS	P8563 B8M	A193 GR.B8M
7	HEAVY HEX NUT	SEE CHART	316SS	P78 12 B8M	A194 GR.8M
8	WASHER	2	304SS	V13936 R	
9	RATING TAG	1	304SS	V21864	

- NOTES:
- DIMENSIONS IN INCHES W/ mm EQUIVALENTS IN BRACKETS.
 - TRANSPARENT GAGE RATING VARIANCE:
 - 3000 PSI (211 KG/CM²) @ 100°F (38°C)
 - 1730 PSI (122 KG/CM²) @ 800°F (427°C)
 - >550°F REQUIRES GRAFOIL GASKETS
 - >600°F REQUIRES GRAFOIL GASKETS & ALUMINOSILICATE GLASS
 - MAX SATURATED STEAM RATING FOR TRANSPARENT GAGE (W/ MICA) IS 750 WSP.
 - REFER TO THE FOLLOWING (FOR):
 - CATALOG BULLETIN J100.10 (FULL RATINGS & ADDITIONAL INFORMATION)
 - 10M BULLETIN J500.05 (INSTRUCTIONS)
 - PRICE SHEET BULLETINS J800.11, 12, 18 (AVAILABLE OPTIONS)
 - CONSULT FACTORY FOR ALTERNATE MATERIAL OPTIONS.

1/2" [15] OR 3/4" [20] FNPT OR FSW
BOTH ENDS

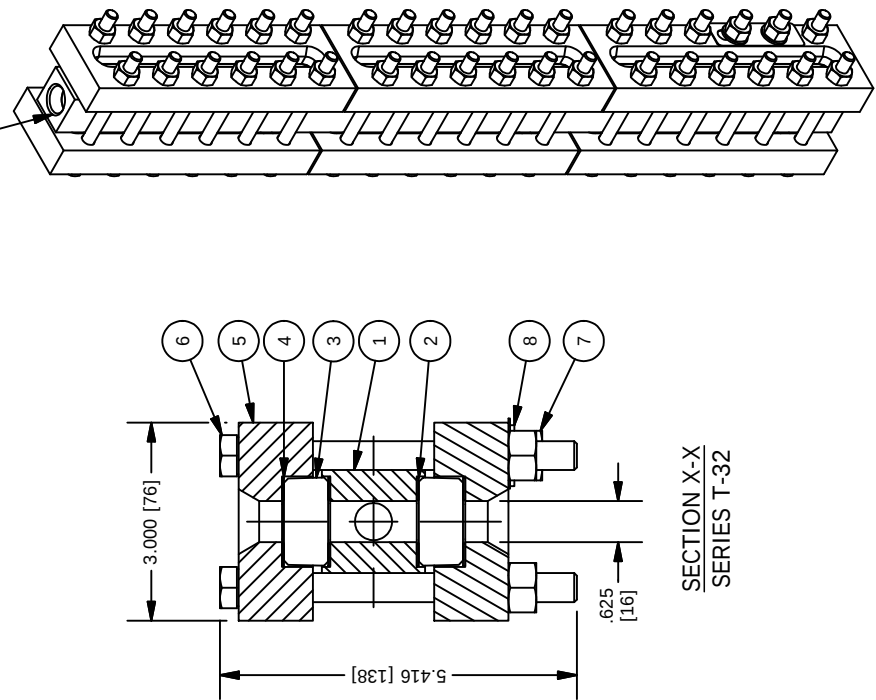

SECTION X-X
SERIES T-32

TRANSPARENT GAGE
T-32

MANUFACTURED BY

Clark-Reliance®

16633 FOLTZ PARKWAY

STRONGSVILLE, OH 44149 USA

(440) 572-1500 | www.clarkreliance.com

© Clark-Reliance® Corporation. All Rights Reserved.

JERGUSON®

SERIES 32 GAGES

END CONNECTED

(ALL 316SS)

DRAWN: JJB

CHECKED: MK

DATE: 2/23/2016

REVISION: 1

DRAWING NO.: 32-EC-ALL316

REV.: 1