

SPECIFICATIONS

DIMENSIONS:

Height: 46" (1170 mm)
Width: 28" (711.2 mm)
Depth: 26" (660.4 mm)
Weight: 300lbs (136kg)

STANDARD VOLTAGE:

230V-1PH-60Hz
(other voltages available on request)

SYSTEM PERFORMANCE:

Removes 100% of free water

Removes up to 80% of dissolved water

Filter to 10 microns

Viton Seals Standard

60 US Gallons (230 L) per hour flow rate

0.25 US Gallon (0.9 L) per hour water removal rate

3 kW heater

Maximum oil viscosity 220 cSt

Vacuum blank-off rating 27.5 inHg

Enervac International ULC
280 Holiday Inn Drive
Cambridge, Ontario
Canada
N3C 1Z4
(P) 1-519-651-1034
(F) 1-519-651-1038
www.enervac.com
sales@enervac.com




For more information scan the code!

MINI DEHYDRATOR – E859C SERIES



This lightweight Mini Dehydrator cart is the most cost effective way to extend the life of hydraulic and lubrication fluids. This air-cooled unit will dehydrate, filter and de-aerate fluids.

The Mini-Dehydrator is ideally suited for small volumes up to 264 US Gallons (1000L) of hydraulic fluids, lubricating oils, turbine oils, transmission fluids, quenching oils and synthetic fluids.

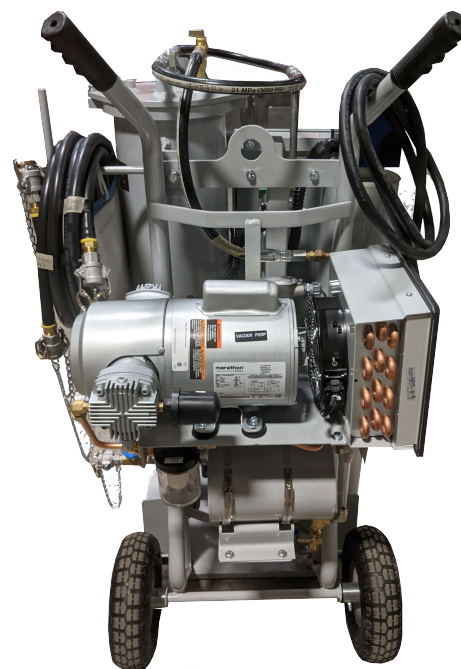

FEATURES:

- Mounted on a convenient cart with 10" (250 mm) pneumatic tires for ease of movement
- Air-cooled
- Unattended operation
- 1 US Gallon (3.8 L) condensate tank with level indicator
- Unit comes with 10' (3m) power cord
- Unit comes with TWO x 10' (3m) durable rubber oil hoses with male and female camlock connectors
- Uses Enervac's exclusive accelerator elements for high performance moisture removal

Performance Curve - E859C

